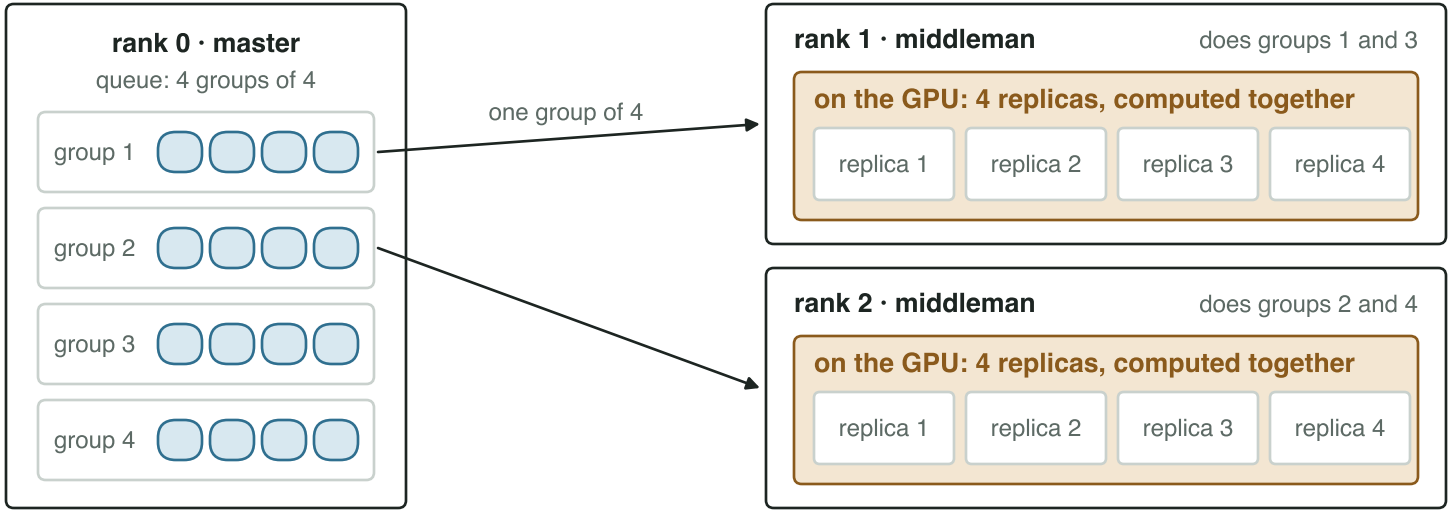

GPU memory of one middleman (BFdb 6P, measured)



The topology is shared by all replicas; each extra replica only adds its own parameters, coordinates and shells.